


MAINLY USED IN LATHES WITH THE AIM OF STABILIZING LONG AND THIN PIECES, MORE SUBJECT TO BENDING OR UNCONTROLLED OSCILLATION...

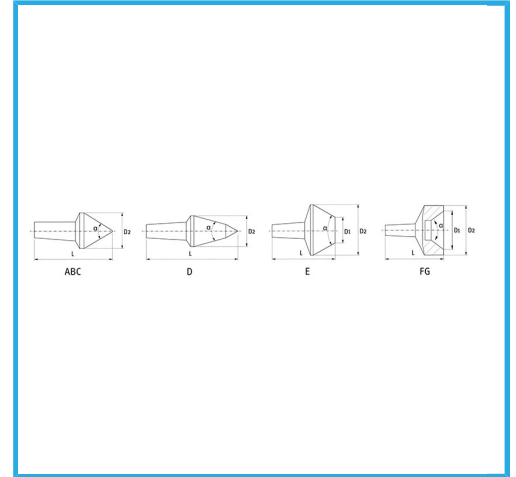

Morse taper

A	MT 2
B	L2 39 mm - D2-D3 16 mm - $\hat{I}\pm 60^\circ$ mm
C	L2 35,5 mm - D2-D3 16 mm - $\hat{I}\pm 75^\circ$ mm
D	L2 33 mm - D2-D3 16 mm - $\hat{I}\pm 90^\circ$ mm
E	L2 46 mm - D2-D3 16 mm - $\hat{I}\pm 60^\circ$ mm
F	L2 40 mm - D2-D3 25 mm / 10 mm - $\hat{I}\pm 60^\circ$ mm
G	L2 36 mm - D2-D3 16 mm / 10 mm - $\hat{I}\pm 60^\circ$ mm
G	L2 39 mm - D2-D3 20 mm / 16 mm - $\hat{I}\pm 60^\circ$ mm

rpm max	5000 g/min
Maximum capacity	45 kg
Gross weight	1,32 kg
Packaging dimensions	305x165x70h mm
EAN Code	8012667244682



Carrying case



Tempered



9 Pcs



Steel



Grounded