



TO SLIGHTLY CORRECT THE AXIALITY AND DIAMETER OF THE HOLES.  
 IT CAN WORK AUTOMATICALLY AND MANUALLY.

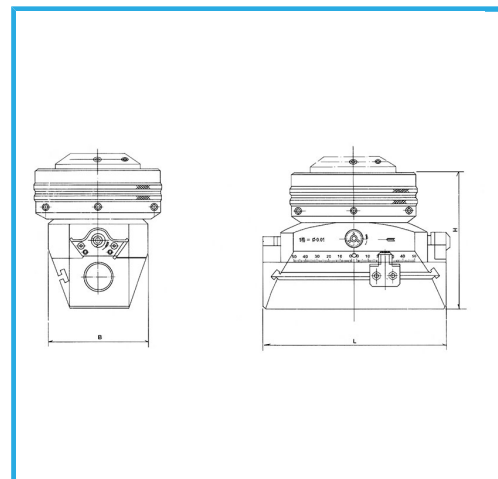

|                                          |                                  |
|------------------------------------------|----------------------------------|
| Max facing and boring $\varnothing$      | 150 mm                           |
| Max stroke of slide                      | $\pm 15$ mm                      |
| Fine feed per graduation                 | 0,005 mm                         |
| Manual feed per revolution               | 2 mm                             |
| Self acting feed per revolution          | 0,02-0,04-0,06 0,08-0,10-0,12 mm |
| $\varnothing$ of tool post holes in head | 18 mm                            |
| Max $\varnothing$ of head                | 90 mm                            |
| Height of head without shank - (H)       | 87,5 mm                          |
| Weight of head without shank             | 2,9 kg                           |
| Length of sliding block                  | 75 (L) mm                        |
| Width of sliding block                   | 70 (B) mm                        |
| Collets hole                             | 4 - 8 - 12 $\varnothing$ mm      |
| Accessories                              | 1 - 2 - 6                        |
| Extension hole for tool holder           | $\varnothing$ 6 mm               |
| Shank                                    | ISO40 - DIN2080                  |
| Gross weight                             | 8,45 kg                          |
| Packaging dimensions                     | -                                |
| EAN Code                                 | 8012667002909                    |

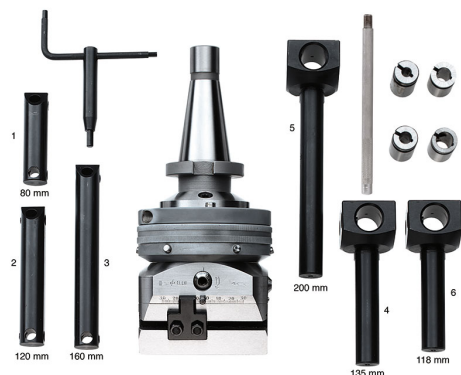

Box

40 Cr



Grounded