

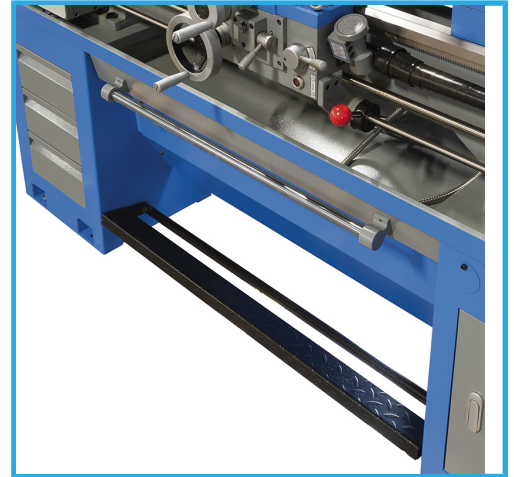


WITH SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH.

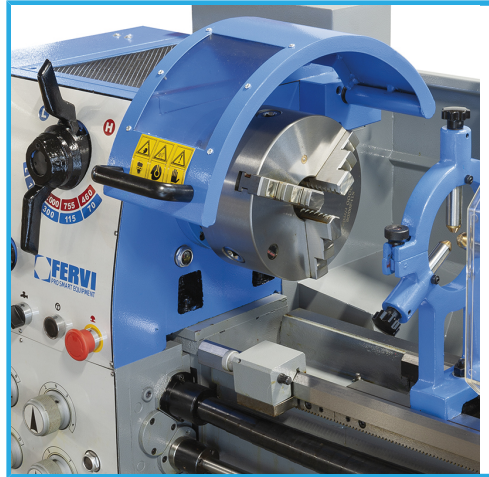

FERVIplus

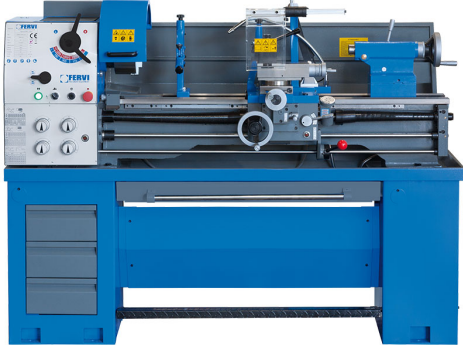

Centers height	190 mm
Max swing over the bed	380 mm
Max swing over the cross slide	225 mm
Max swing over the gap	503 mm
Tool height	20 mm
Distance between centers	1000 mm
Spindle bore	51 mm
Spindle nose Camlock	Camlock D1-5
Spindle bore taper MT	6
Spindle speed	70 - 2000 rpm
Longitudinal feeds	0,052 - 1,392 mm/rev
Cross feeds	0,014 - 0,380 mm/rev
Metric threads	0,4 - 7 mm
Inch threads	4 - 56 TPI
Tailstock taper MT	4
Motor	400 V 50 Hz 1,5 kW
Cooling pump	400 V 50 Hz 50 W
Dimensions	1820 x 800 x 1320h mm
Net weight	630 kg
Packaging dimensions	1930 x 760 x 1600h mm
Gross weight	633,00 kg
EAN Code	8012667289386

Included

3+3 jaw self centering chuck Ø 200 mm
 4 Reversible independent jaws chuck Ø 200 mm
 Reduction sleeve MT 6/4
 Face plate Ø 320 mm
 Follow rest
 Steady rest
 2 x Dead center MT 4
 Live center MT 4
 Foot brake
 Thread dial
 Turret guard
 Leadscrew hood
 Chuck safeguard
 TOAE quick change tool post
 Working LED lamp
 Full length splash guard
 Cooling system
 Clutch on turning bar
 Quick locking tailstock carriage
 Wagon gears in oil bath