



WITH 2 SPEED MOTOR AND 3 AXIS READOUT, SEMI NORTON GEAR BOX. WITH CAST IRON MONOBLOC BASE.

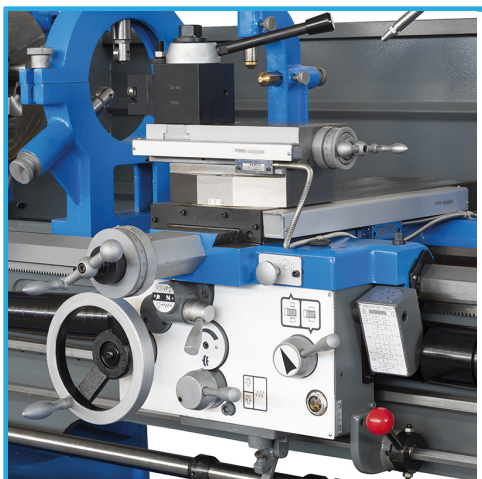

FERVIplus

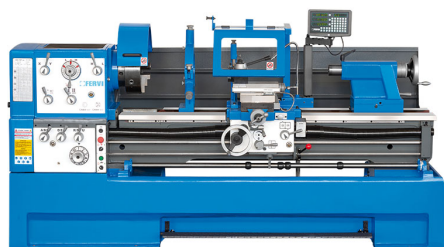

Centers height	230 mm
Max swing over the bed	460 mm
Max swing over the cross slide	270 mm
Max swing over the gap	690 mm
Tool height	25 mm
Distance between centers	1500 mm
Spindle bore	58 mm
Spindle nose Camlock	Camlock D1-6
Spindle bore taper MT	6
Spindle speed	(12) 25 - 2000 rpm
Longitudinal feeds	(42) 0,031 - 1,7 mm/rev
Cross feeds	(42) 0,014 - 0,784 mm/rev
Metric threads	(41) 0,1 - 14 mm
Inch threads	(60) 2 - 112 TPI
Tailstock taper MT	4
Motor	400 V 50 Hz 5,5 kW
Cooling pump	400 V 50 Hz 90 W
Dimensions	2750 x 1080 x 1370 mm
Net weight	1900 kg
Packaging dimensions	2870 x 1180 x 1570 mm
Gross weight	1900,00 kg
EAN Code	8012667432270

Included

3+3 jaw self centering chuck Ø 250 mm
4 independent jaw chuck Ø 300 mm
Reduction sleeve MT 6/4
Face plate Ø 350 mm
Follow rest
Steady rest
2 x Dead center MT 4
Live center MT 4
Thread dial
Turret guard
Chuck safeguard
Full length splash guard
Quick change tool post type B
Working lamp LED
Cooling system
Foot brake
Quick locking tailstock carriage
Wagon gears in oil bath
Adjustable leveling feet