



WITH 2 SPEED MOTOR AND 3 AXIS READOUT, SEMI NORTON GEAR BOX. WITH CAST IRON MONOBLOC BASE.

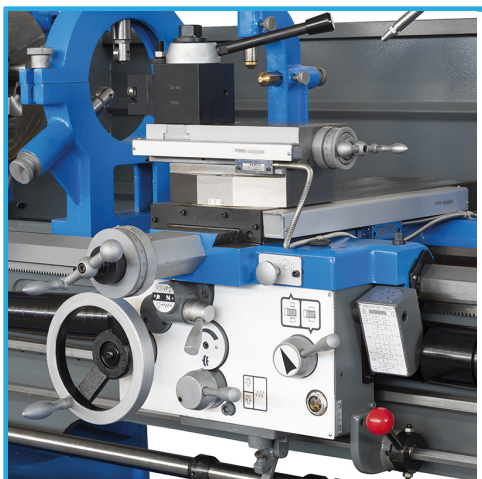

FERVIplus

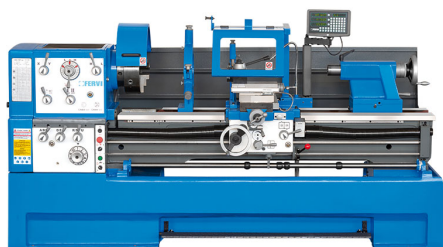

Centers height	280 mm
Max swing over the bed	560 mm
Max swing over the cross slide	355 mm
Max swing over the gap	785 mm
Tool height	25 mm
Distance between centers	1500 mm
Spindle bore	80 mm
Spindle nose Camlock	Camlock D1-8
Spindle bore taper MT	7
Spindle speed	(12) 25 - 1600 rpm
Longitudinal feeds	(35) 0,059 - 1,646 mm/rev
Cross feeds	(35) 0,020 - 0.573 mm/rev
Metric threads	(47) 0,2 - 14 mm
Inch threads	(60) 2 - 112 TPI
Tailstock taper MT	5
Motor	400 V 50 Hz 7,5 kW
Cooling pump	400 V 50 Hz 90 W
Dimensions	3340 x 1150 x 1610 mm
Net weight	2600 kg
Packaging dimensions	3460 x 1250 x 1810 mm
Gross weight	2600,00 kg
EAN Code	8012667432263

Included

3+3 jaw self centering chuck Ø 315 mm
4 independent jaw chuck Ø 400 mm
Reduction sleeve MT 7/5
Face plate Ø 450 mm
Follow rest
Steady rest
2 x Dead center MT 5
Live center MT 5
Thread dial
Turret guard
Chuck safeguard
Full length splash guard
Quick change tool post type C
Working lamp LED
Cooling system
Foot brake
Quick locking tailstock carriage
Wagon gears in oil bath
Adjustable leveling feet