



WITH MECHANICAL SPINDLE CLUTCH AND 3 AXIS READOUT, SEMI NORTON GEAR BOX. EQUIPPED WITH A JOYSTICK FOR THE INSERTION OF RAPID...

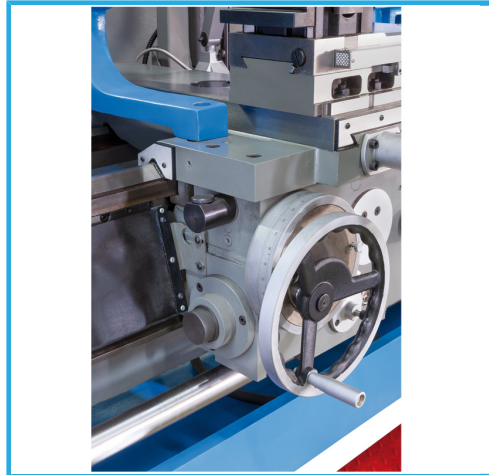

FERVIplus

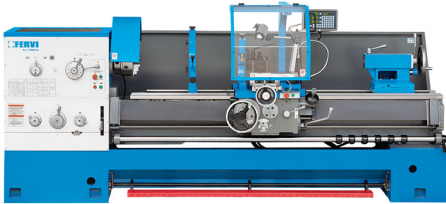

Centers height	250 mm
Max swing over the bed	500 mm
Max swing over the cross slide	310 mm
Max swing over the gap	720 mm
Tool height	32 mm
Distance between centers	1000 mm
Spindle bore	80 mm
Spindle nose Camlock	Camlock D1-8
Spindle bore taper MT	7
Spindle speed	(12) 36 - 1600 rpm
Longitudinal feeds	0,063 - 2,52 mm/rev
Cross feeds	0,063 - 2,52 mm/rev
Metric threads	(22) 1 - 14 mm
Inch threads	(26) 2 - 28 TPI
Tailstock taper MT	5
Motor	400 V 50 Hz 7,5 kW
Cooling pump	400 V 50 Hz 90 W
Dimensions	2500 x 1400 x 1500 mm
Net weight	2840 kg
Packaging dimensions	2500 x 1400x 1500h mm
Gross weight	3555,00 kg
EAN Code	8012667402006

Included

3 reversible jaw self centering chuck Ø 250 mm
 4 independent jaw chuck Ø 320 mm
 Reduction sleeve MT 7/5
 Face plate Ø 400 mm
 Follow rest
 Steady rest
 Dead center MT 5
 Live center MT 5
 Thread dial
 Leadscrew hood
 Turret guard
 Chuck safeguard
 Full length splash guard
 Italy style quick change tool post type C
 Working LED lamp
 Cooling system
 Electromechanical foot brake
 Tailstock carriage a quick locking
 Wagon gears in oil bath
 Adjustable leveling feet