



WITH MECHANICAL SPINDLE CLUTCH AND 3 AXIS READOUT, SEMI NORTON GEAR BOX. EQUIPPED WITH A JOYSTICK FOR THE INSERTION OF RAPID...

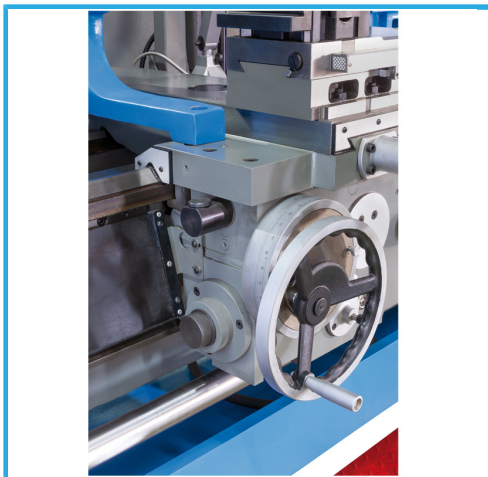

**FERVI**plus

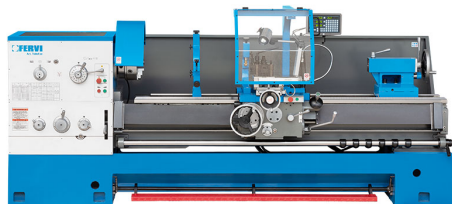

<b>Centers height</b>	250 mm
<b>Max swing over the bed</b>	500 mm
<b>Max swing over the cross slide</b>	310 mm
<b>Max swing over the gap</b>	720 mm
<b>Tool height</b>	32 mm
<b>Distance between centers</b>	2000 mm
<b>Spindle bore</b>	80 mm
<b>Spindle nose Camlock</b>	Camlock D1-8
<b>Spindle bore taper MT</b>	7
<b>Spindle speed</b>	(12) 36 - 1600 rpm
<b>Longitudinal feeds</b>	0,063 - 2,52 mm/rev
<b>Cross feeds</b>	0,027 - 1,07 mm/rev
<b>Metric threads</b>	(22) 1 - 14 mm
<b>Inch threads</b>	(26) 2 - 28 TPI
<b>Tailstock taper MT</b>	5
<b>Motor</b>	400 V 50 Hz 7,5 kW
<b>Cooling pump</b>	400 V 50 Hz 90 W
<b>Dimensions</b>	3500 x 1400 x 1500 mm
<b>Net weight</b>	3320 kg
<b>Packaging dimensions</b>	3500 x 1400 x 1500h mm
<b>Gross weight</b>	3320,00 kg
<b>EAN Code</b>	8012667376345

### Included

3 reversible jaw self centering chuck Ø 250 mm  
 4 independent jaw chuck Ø 320 mm  
 Reduction sleeve MT 7/5  
 Face plate Ø 400 mm  
 Follow rest  
 Steady rest  
 Dead center MT 5  
 Live center MT 5  
 Thread dial  
 Leadscrew hood  
 Turret guard  
 Chuck safeguard  
 Full length splash guard  
 Italy style quick change tool post type C  
 Working LED lamp  
 Cooling system  
 Electromechanical foot brake  
 Tailstock carriage a quick locking  
 Wagon gears in oil bath  
 Adjustable leveling feet