



WITH MECHANICAL SPINDLE CLUTCH AND 3 AXIS READOUT, SEMI NORTON GEAR BOX. EQUIPPED WITH A JOYSTICK FOR THE INSERTION OF RAPID...

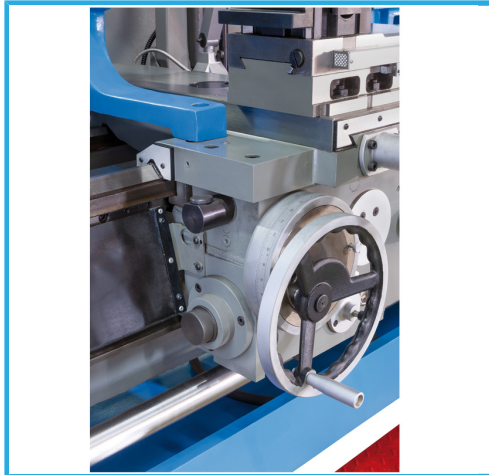

**FERVI**plus

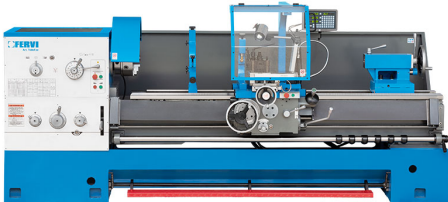

<b>Centers height</b>	280 mm
<b>Max swing over the bed</b>	560 mm
<b>Max swing over the cross slide</b>	360 mm
<b>Max swing over the gap</b>	770 mm
<b>Tool height</b>	32 mm
<b>Distance between centers</b>	1500 mm
<b>Spindle bore</b>	105 mm
<b>Spindle nose Camlock</b>	Camlock D1-8
<b>Spindle speed</b>	(12) 36 - 1600 rpm
<b>Longitudinal feeds</b>	0,063 - 2,52 mm/rev
<b>Cross feeds</b>	0,027 - 1,07 mm/rev
<b>Metric threads</b>	(22) 1 - 14 mm
<b>Inch threads</b>	(26) 2 - 28 TPI
<b>Tailstock taper MT</b>	5
<b>Motor</b>	400 V 50 Hz 7,5 kW
<b>Cooling pump</b>	400 V 50 Hz 90 W
<b>Dimensions</b>	3000 x 1400 x 1500 mm
<b>Net weight</b>	3210 kg
<b>Gross weight</b>	3555,00 kg
<b>EAN Code</b>	8012667402167
<b>Packaging dimensions</b>	3000 x 1400 x 1500h mm

### Included

- 3 reversible jaw self centering chuck Ø 320 mm
- 4 independent jaw chuck Ø 400 mm
- Special reduction sleeve 105 mm/MT 5
- Face plate Ø 600 mm
- Follow rest
- Steady rest
- Dead center MT 5
- Live center MT 5
- Thread dial
- Leadscrew hood
- Tool post guard
- Chuck safeguard
- Full length splash guard
- Italy style quick change tool post type C
- Working LED lamp
- Cooling system
- Electromechanical foot brake
- Tailstock carriage a quick locking
- Wagon gears in oil bath
- Adjustable leveling feet