



WITH MECHANICAL SPINDLE CLUTCH AND 3 AXIS READOUT, SEMI NORTON GEAR BOX. EQUIPPED WITH A JOYSTICK FOR THE INSERTION OF RAPID...

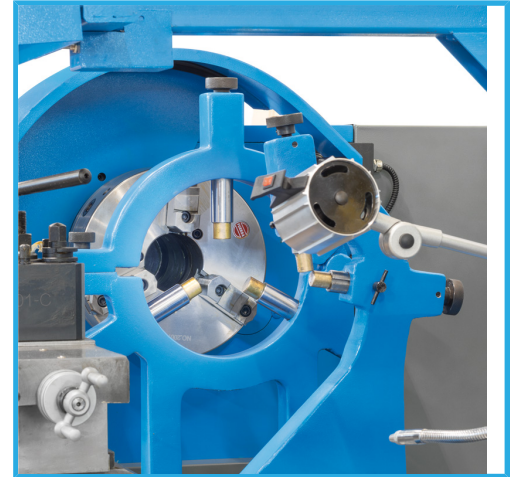

**FERVI**plus

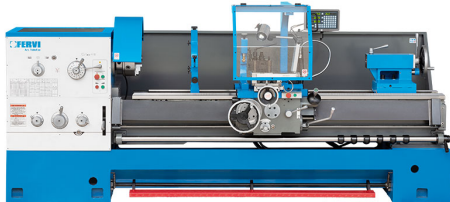

<b>Centers height</b>	330 mm
<b>Max swing over the bed</b>	660 mm
<b>Max swing over the cross slide</b>	420 mm
<b>Max swing over the gap</b>	870 mm
<b>Tool height</b>	32 mm
<b>Distance between centers</b>	1500 mm
<b>Spindle bore</b>	105 mm
<b>Spindle nose Camlock</b>	Camlock D1-8
<b>Spindle speed</b>	(12) 36 - 1600 rpm
<b>Longitudinal feeds</b>	0,063 - 2,52 mm/rev
<b>Cross feeds</b>	0,027 - 1,07 mm/rev
<b>Metric threads</b>	(22) 1 - 14 mm
<b>Inch threads</b>	(26) 2 - 28 TPI
<b>Tailstock taper MT</b>	5
<b>Motor</b>	400 V 50 Hz 7,5 kW
<b>Cooling pump</b>	400 V 50 Hz 90 W
<b>Dimensions</b>	3000 x 1400 x 1600 mm
<b>Net weight</b>	3330 kg
<b>EAN Code</b>	8012667402150
<b>Packaging dimensions</b>	3000 x 1400 x 1600h mm
<b>Gross weight</b>	3300,00 kg

### Included

3 reversible jaw self centering chuck Ø 320 mm  
 4 independent jaw chuck Ø 400 mm  
 Special reduction sleeve 105 mm/MT 5  
 Face plate Ø 600 mm  
 Follow rest  
 Follow rest  
 Dead center MT 5  
 Live center MT 5  
 Thread dial  
 Leadscrew hood  
 Tool post guard  
 Chuck safeguard  
 Full length splash guard  
 Italy style quick change tool post type C  
 Working LED lamp  
 Cooling system  
 Electromechanical foot brake  
 Tailstock carriage a quick locking  
 Wagon gears in oil bath  
 Adjustable leveling feet