



WITH MECHANICAL SPINDLE CLUTCH AND 3 AXIS READOUT, SEMI NORTON GEAR BOX. EQUIPPED WITH A JOYSTICK FOR THE INSERTION OF RAPID...

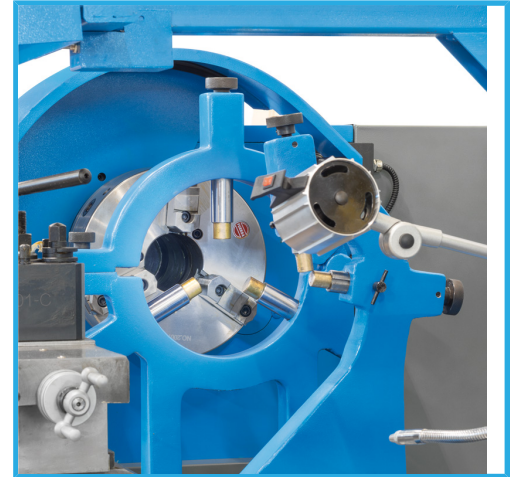

FERVIplus

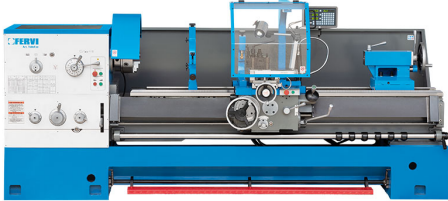

Centers height	330 mm
Max swing over the bed	660 mm
Max swing over the cross slide	420 mm
Max swing over the gap	870 mm
Tool height	32 mm
Distance between centers	2000 mm
Spindle bore	105 mm
Spindle nose Camlock	Camlock D1-8
Spindle speed	(12) 36 - 1600 rpm
Longitudinal feeds	0,063 - 2,52 mm/rev
Cross feeds	0,027 - 1,07 mm/rev
Metric threads	(22) 1 - 14 mm
Inch threads	(26) 2 - 28 TPI
Tailstock taper MT	5
Motor	400 V 50 Hz 7,5 kW
Cooling pump	400 V 50 Hz 90 W
Dimensions	3500 x 1400 x 1600 mm
Net weight	3700 kg
EAN Code	8012667402075
Packaging dimensions	3500 x 1400 x 1600h mm
Gross weight	3820,00 kg

Included

3 reversible jaw self centering chuck Ø 320 mm
 4 independent jaw chuck Ø 400 mm
 Special reduction sleeve 105 mm/MT 5
 Face plate Ø 600 mm
 Follow rest
 Follow rest
 Dead center MT 5
 Live center MT 5
 Thread dial
 Leadscrew hood
 Tool post guard
 Chuck safeguard
 Full length splash guard
 Italy style quick change tool post type C
 Working LED lamp
 Cooling system
 Electromechanical foot brake
 Tailstock carriage a quick locking
 Wagon gears in oil bath
 Adjustable leveling feet