
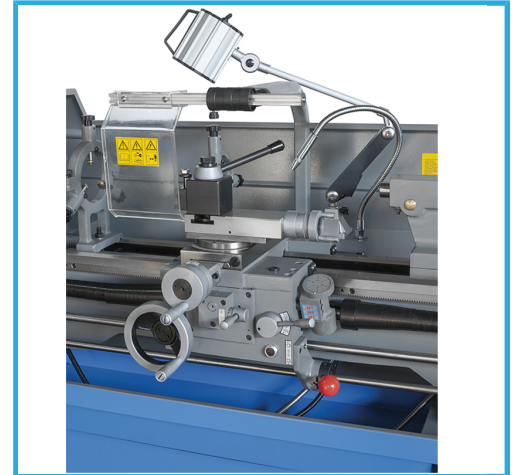


WITH SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH.

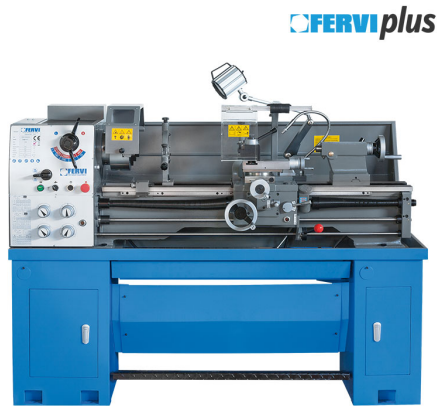

Centers height	160 mm
Max swing over the bed	320 mm
Max swing over the cross slide	198 mm
Max swing over the gap	470 mm
Tool height	20 mm
Distance between centers	1000 mm
Spindle bore	51 mm
Spindle nose Camlock	Camlock D1-5
Spindle bore taper MT	5
Spindle speed	(8) 70 - 2000 rpm
Longitudinal feeds	0,052 - 1,392 mm/rev
Cross feeds	0,009 - 0,253 mm/giro
Metric threads	0,4 - 7 mm
Inch threads	4 - 56 TPI
Tailstock taper MT	3
Motor	400 V 50 Hz 1,5 kW
Cooling pump	400 V 50 Hz 40 W
Dimensions	1820 x 800 x 1320h mm
Net weight	625 kg
Packaging dimensions	1930 x 760 x 1600 h mm
Gross weight	830,00 kg
EAN Code	8012667276348

Included

- 3+3 jaw self centering chuck Ø 200 mm
- 4 Reversible independent jaws chuck Ø 200 mm
- Reduction sleeve MT 6/4
- Face plate Ø 320 mm
- Follow rest
- Steady rest
- Dead center MT 3
- Dead center MT 4
- Live center MT 3
- Foot brake
- Thread dial
- Leadscrew hood
- Turret protection
- Chuck safeguard
- Full length splash guard
- TOAE quick change tool post
- Working LED lamp
- Cooling system
- Clutch on turning bar
- Quick locking tailstock carriage
- Wagon gears in oil bath