

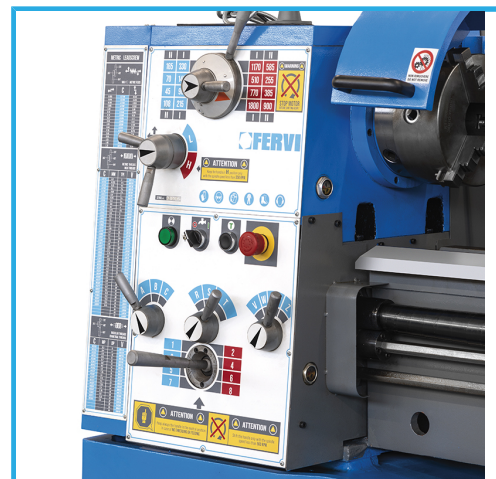


WITH 2 SPEED MOTOR AND 3 AXIS READOUT, SEMI NORTON GEAR BOX. WITH CAST IRON MONOBLOC BASE.

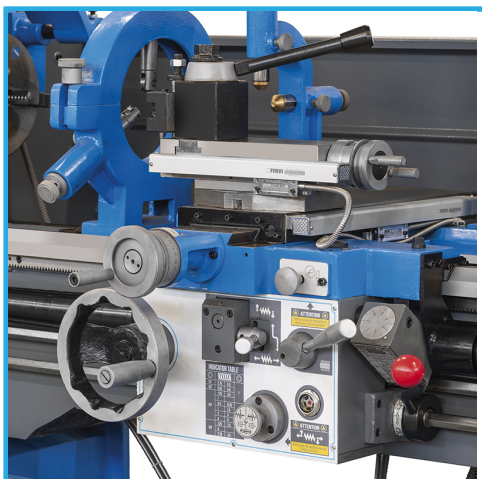

**FERVI**plus

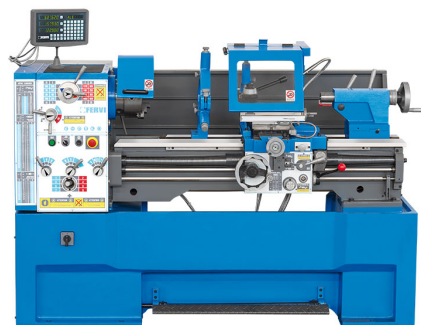

|                                |                           |
|--------------------------------|---------------------------|
| Centers height                 | 210 mm                    |
| Max swing over the bed         | 420 mm                    |
| Max swing over the cross slide | 255 mm                    |
| Max swing over the gap         | 580 mm                    |
| Tool height                    | 20 mm                     |
| Distance between centers       | 1000 mm                   |
| Spindle bore                   | 52 mm                     |
| Spindle nose Camlock           | Camlock D1-6              |
| Spindle bore taper MT          | 6                         |
| Variable spindle speed         | (16) 45 - 1800 rpm        |
| Spindle speed                  | (16) 45 - 1800 rpm        |
| Longitudinal feeds             | (17) 0,05 - 1,7 mm/giro   |
| Cross feeds                    | (17) 0,025 - 0,85 mm/giro |
| Metric threads                 | (42) 0,2 - 14 mm          |
| Inch threads                   | (45) 0,2 - 14 mm          |
| Tailstock taper MT             | 4                         |
| Motor                          | 400 V 50 Hz 2,2/3,3 kW    |
| Cooling pump                   | 400 V 50 Hz 90 W          |
| Dimensions                     | 2030 x 1000 x 1450 mm     |
| Net weight                     | 1200 kg                   |
| Packaging dimensions           | 2150 x 1100 x 1650 mm     |
| Gross weight                   | 1200,00 kg                |
| EAN Code                       | 8012667432287             |

## Included

3+3 jaw self centering chuck Ø 200 mm  
4 independent jaw chuck Ø 250 mm  
Reduction sleeve MT 6/4  
Face plate Ø 350 mm  
Follow rest  
Steady rest  
2 x Dead center MT 4  
Live center MT 4  
Thread dial  
Turret guard  
Chuck safeguard  
Full length splash guard  
Quick change tool post type B  
Working lamp LED  
Cooling system  
Foot brake  
Quick locking tailstock carriage  
Wagon gears in oil bath  
Adjustable leveling feet